



MODEL DESCRIPTION	SINGLE ZONE	DUAL ZONE
Wine Column, Glass Door, SS Sides Hinged Left	CC24W-1-4L	CC24D-1-4L
Wine Column, Glass Door, SS Sides Hinged Right	CC24W-1-4R	CC24D-1-4R

SPECIFICATIONS		SINGLE ZONE	DUAL ZONE
NUMBER OF DOORS		1	1
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	23-3/4" (603)	23-3/4" (603)
	Depth - in. (mm)	24-1/16"* (611)	24-1/16"* (611)
	Height - in. (mm)	84" (2134)	84" (2134)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	19-3/4" (502)	19-3/4" (502)
	Depth - in. (mm)	18" (457)	18" (457)
	Height - in. (mm)	61-1/8" (1552)	61-1/8" (1552)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		12.6 (357)	12.2 (345)
PRODUCT CAPACITY 750ml bottles	8 per fixed, 6 per display, 4 dessert wine	11-1	10-1
		94	86
SHIPPING WEIGHT Lbs. (kg.)		534	541
ELECTRICAL SPECIFICATIONS	Electrical Supply	115/60Hz/1PH	115/60Hz/1PH
	Running Load Amps	2.6	2.6
	Electrical Connection	Cord Connected NEMA 5-15P	Cord Connected NEMA 5-15P
	Defrost Type	Off Cycle	Off Cycle
	Lighting Type	LED	LED
REFRIGERANT	R600a Isobutane	53 grams	53 grams
	Temperature Range (F)	40° - 68° F	40° - 68° F
ACCESSORIES	36" Two Tone Polished Chrome and Stainless Steel Handle		
	Field installed stainless steel overlay for glass door (Left or Right hinged)		
*Without Overlay Panel			



Warranty

ONE YEAR PARTS & LABOR WARRANTY

Perlick products are guaranteed against defects in both material and workmanship for a period of one year from date of sale. Defective parts will be replaced on a no-charge basis when adjudged defective upon inspection. We are not responsible for parts damaged by alteration, unauthorized service, accident or abuse. Other costs incident to replacement, to include loss of sales and/or loss of product must be borne by the user. Warranty repairs will be performed during Perlick's authorized service agent's normal business hours. The user is responsible for any overtime premium associated with after-hours service. Also, Perlick is not responsible for travel charges that exceed one hour travel time.

1. Parts returned to Perlick shall be returned freight prepaid and shall be identified with Perlick's serial number and return merchandise authorization number.
2. Improper operation due to voltage variances, inadequate wiring and physical damage is the responsibility of the purchaser. They are not manufacturing defects.
3. Condenser coils shall be cleaned regularly. Failure to provide an adequate flow of cooling air will void this warranty.
4. Factory-specified maintenance and installation will be provided by the selling dealer who shall also be responsible for the installation and set up of these products in accordance with local plumbing, refrigeration and electrical codes.



Form No. Z2488
Rev. 01.31.2018

WINE COLUMN REFRIGERATION

A HIGHER LEVEL OF CRAFTSMANSHIP, FEATURES & PERFORMANCE FOR WINE PRESERVATION

ecofriendly

R600A Refrigerant

High Capacity — Small Footprint.

Don't let limited square footage limit your wine list. By expanding up, you'll have plenty of space to create an impressive offering of fine vintages. Perlick's space efficient, climate controlled column refrigeration for wine takes advantage of available vertical space.

Features and Benefits

- » 84" tall - 24" x 24" footprint provides high capacity wine storage in a compact space.
- » Environmentally friendly. R600A Isobutane refrigerant - high-efficiency, zero ozone depletion. Minimal GWP.
- » Single and Dual Zone Models Available.
- » Stainless Steel sides for a classic, easy to clean look.
- » Factory set sensor maintains optimum humidity level.
- » On board carbon filtration removes odor causing impurities.
- » High Capacity Storage –
 - + Single Zone – 94 Bottles (99 Bottles if you double stack the display shelf)
 - + Dual Zone – 86 Bottles Total (91 Bottles if you double stack the display shelf)
- » Blue and White LED interior lighting. Slow fade on and off.
- » Triple pane, Low-E, bronze tinted glass is energy efficient and protects wine from exposure to UV.
- » Door finishing options –
 - + Field installed stainless steel overlay with full length heavy-duty handle. (optional)
 - + Field installed wood overlay with handle provided by customer.
 - + Base model does not include door overlay. (optional)
- » Auto alarms alert user to temperatures that exceed high or low setting or open door.
- » Secure storage for valuable vintages. Door lock included.



Superior Features — Unmatched Performance

Convertible Display Shelf

Lends in versatility. In display mode, it showcases your finest vintages.

In standard, flat mode it maximizes storage capacity. May be used in either temperature zone.



Heavy-Duty, full extension, soft closing wine shelves.

Shelves are black polymer dipped to provide vibration protection and protect labels from abrasion.




PerliQ - State of the Art digital touch screen.

Provides precise temperature and humidity control as well as access to all functions. Maintains optimum relative humidity to preserve labels and natural corks.



Independent settings for open and closed door lighting.

Lighting brightness control displays intensity settings in 20% increments (20-40-60-80-100%).

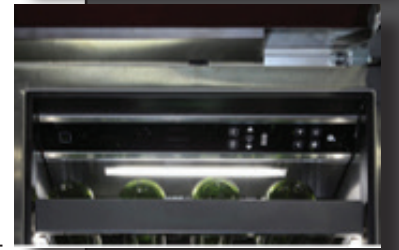

Commercial grade construction for outstanding long-term performance.

Heavy-duty hinges provide smooth operation and exceptional durability.



Variable speed compressor allows for slower operating speed and quieter operation.



Refrigeration cartridge is removable to provide easy access if servicing is ever required.

