



# PERLICK®



## G5 24" BEVERAGE DISPENSER



Crafted with over a century of premier commercial refrigeration expertise, the Perlick G5 collection brings the most innovative refrigeration available into the home—empowering hosts to serve effortlessly, whether for one guest or many.

Job:  
Area:  
Item #:  
Model #:



G5BD24SC



| MODEL NUMBER | MANUFACTURER ITEM NUMBER | DESCRIPTION                                     |
|--------------|--------------------------|-------------------------------------------------|
| G5BD24SC     | URC24T21-5-SR00          | 24" BEVERAGE DISPENSER, SOLID DOOR, HINGE RIGHT |

### G5 Collection Feature-Benefits

- **High-Performance Cooling:** Perlick's fastest cool-down speed yet, powered by Perlick's exclusive RAPIDcool™ technology chills every beverage quickly and evenly throughout the cabinet
- **Seamless, Beautiful Design:** Sleek cabinet profile and fully concealed, soft-closing hinges integrate effortlessly into surrounding cabinetry
- **Trusted Performance:** Certified for indoor and outdoor use, delivering consistent performance in kitchens, patios, or rooftop terraces
- **Smart Technology:** Adapts to your usage and environment for frost-free, consistent cooling, while continuously monitoring unit health for easy troubleshooting and fast remote support
- **3-year parts and labor warranty,** 6-year sealed system parts & labor, with 30-day initial aesthetics parts and labor warranty
- **Quick-Cool Mode:** Chills beverages up to 20% faster for on-demand cooling
- **Intuitive Touchscreen Controls:** Sleek, modern interface with temperature, lighting, and diagnostics on an easy-to-use interface
- **Total Color Control™ LED Lighting:** 20 curated settings, including four distinct white tones, to create any desired aesthetic
- **Ultra-Quiet Performance:** Powered by Perlick-exclusive variable speed technology, delivering quiet operation without compromising cooling power
- **Triple-Pane Glass Doors:** Low-E, argon-filled, UV-resistant glass reduces energy transfer and strengthens durability
- **Perlick Anti-Condensation System™:** Prevents condensation from forming on the exterior of the cabinet
- **Easy Installation:** Patent-pending front-access leveling legs allow quick adjustments without tipping the unit
- **Better For The Environment Refrigerant:** This product uses R600a refrigerant which has zero ODP and very low GWP
- **Exclusively Perlick:** Exclusively designed, engineered and manufactured by Perlick
- All stainless-steel interiors and exteriors, with 400-series stainless steel
- Sabbath Mode-Star K certified that allows equipment to operate in accordance with Halacha, Shabbat, and Jewish Holidays

### G5 Beverage Dispenser Feature-Benefits

- Flat-floor design accommodates a half barrel, two 1/6 barrels, or a slim or standard 1/4 barrel
- 33°F (0.6°C) – 48°F (8.9°C), Factory Set Point 38°F (3.3°C)



800.558.5592

perlick.com



# PERLICK®



## G5 24" BEVERAGE DISPENSER



| MODEL NUMBERS                     |                            | G5BD24SC                                                      |
|-----------------------------------|----------------------------|---------------------------------------------------------------|
| MODEL DESCRIPTION                 |                            | BEVERAGE DISPENSER                                            |
| OVERALL DIMENSIONS                | Width – in. (mm)           | 23 7/8" (606)                                                 |
|                                   | Depth – in. (mm)           | 22 1/2" (572)                                                 |
|                                   | Height – in. (mm)          | 34 5/16" (872)                                                |
| OPENING DIMENSIONS                | Width – in. (mm)           | 24" (610)                                                     |
|                                   | Depth – in. (mm)           | 24" (610)                                                     |
|                                   | Height – in. (mm)          | 34 1/2" (876)                                                 |
| INTERNAL VOLUME Net. Cu. Ft. (L). |                            | 5.1 (144)                                                     |
| SHIPPING WEIGHT Lbs. (kg).        |                            | 174 (79)                                                      |
| EQUIPMENT WEIGHT Lbs. (kg).       |                            | 135 (61)                                                      |
| ELECTRICAL SPECIFICATIONS         | Electrical Supply          | 115VAC/60 Hz/1 Ph                                             |
|                                   | Running Load Amps          | 1.9                                                           |
|                                   | Electrical Connection      | Cord connected                                                |
|                                   | Cord Plug Type             | NEMA 3 Prong 5-15P                                            |
|                                   | Cord Length                | 6'                                                            |
|                                   | Defrost Initiation         | Automatic                                                     |
|                                   | Defrost Type               | Off cycle                                                     |
|                                   | Thermostat                 | Digital                                                       |
|                                   | Lighting Type              | LED                                                           |
| REFRIGERATION SPECIFICATIONS      | Refrigerant                | R600a (57g)                                                   |
|                                   | Expansion Device           | Capillary Tube                                                |
|                                   | Temperature Settings F (C) | 33°F (0.6°C) – 48°F (8.9°C)<br>Factory Set Point 38°F (3.3°C) |
|                                   | Heat Rejection (at 75°F)   | 450 BTU/hr                                                    |
|                                   | Front Vented               | Yes                                                           |

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com](http://perlick.com)



800.558.5592


[perlick.com](http://perlick.com)



# PERLICK®





## G5 24" BEVERAGE DISPENSER

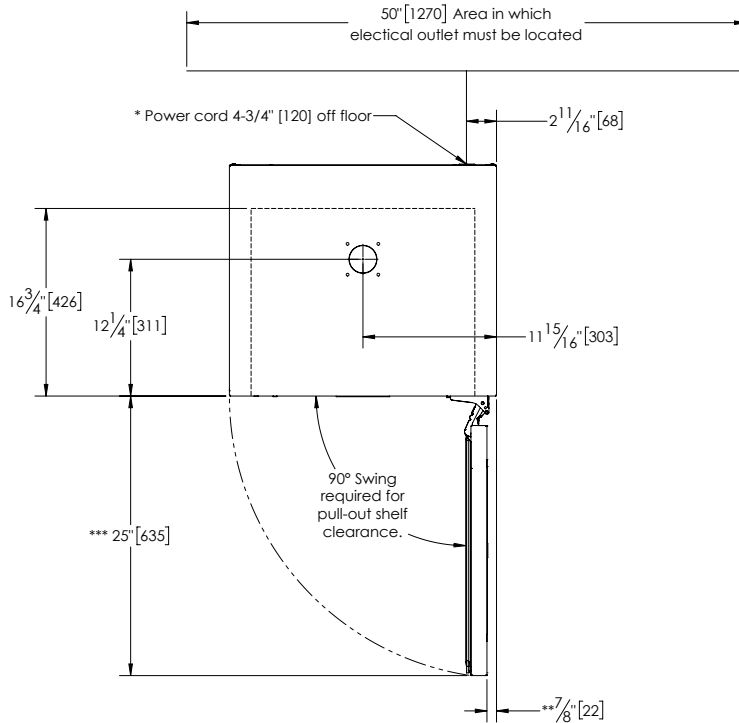

\* - Leg levelers can add 3/4" [19] to these dimensions when fully extended.

\*\* - Overlay will add additionally 3/4" [19] to overall depth. In addition, overall depth will change depending on handle selected.

\*\*\* - Minimum clearance for door swing is shown without door overlay installed.

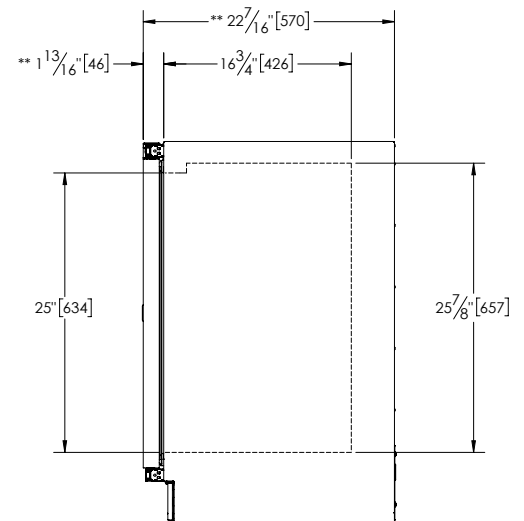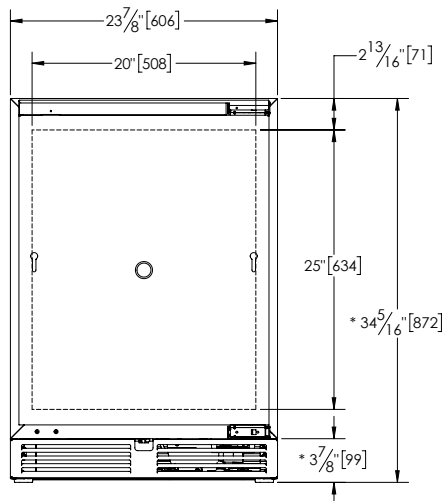

800.558.5592

perlick.com