







_					
n	121	ver	RЛ	м	0

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	DESCRIPTION		
HP24RS-4-5	Indoor Signature Series Refrigerated Stainless Steel Drawers		
<b>HP24RS-4-6</b> Indoor Signature Series Refrigerated Panel Ready Drawers			
<b>HP24RO-4-5</b> Outdoor Signature Series Refrigerated Stainless Steel Draw			
HP24RO-4-6	Outdoor Signature Series Refrigerated Panel Ready Drawers		
HP24RM-4-5	Marine Signature Series Refrigerated Stainless Steel Drawers		
HP24RM-4-6	Marine Signature Series Refrigerated Panel Ready Drawers		

## **KEY PRODUCT FEATURES AND BENEFITS**

- Superior construction provides ideal combination of energy efficient operation & powerful refrigeration performance ideal for food and beverages
- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- All stainless steel interior and exterior provide superior durability and easy cleaning
- Industry's highest capacity refrigerator drawers offers high storage capacity for beverages & food
- Perlick Anti-Condensation System<sup>™</sup> eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

## **Quick Features:**

- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready drawer to match your design style
- Audible door alarm warns user if drawer is held open
- White LED task lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential



MODEL NUMBERS		HP24RS	HP24RO	HP24RM	
MODEL DESCRIPTION		24" Indoor Refrigerated Drawers	24" Outdoor Refrigerated Drawers	24" Marine/Coastal Refrigerated Drawers	
ATTRIBUTES					
Perlick Anti-Condensation System		NO	YES	YES	
Perlick Armor™		NO	NO	YES	
	Width - in. (mm)	23-7/8" (606 mm.)	23-7/8" (606 mm.)	23-7/8" (606 mm.)	
OVERALL DIMENSIONS	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)	
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	34-1/4" (870 mm.)	
	Width - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)	
STANDARD OPENING DIMENSIONS	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)	24" (610 mm.)	
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	34-1/2" (876 mm.)	
INTERNAL VOLUME Net. Cu. Ft.		5.2 cu. ft.	5.2 cu. ft.	5.2 cu. ft.	
SHIPPING WEIGHT Lbs. (kg.)		230 (104.3 kg)	230 (104.3 kg)	233 (105.5 kg)	
	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	
	Running Load Amps	1.9 amps	1.9 amps	1.9 amps	
	Electrical Connection	Cord connected	Cord connected	Cord connected	
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	
ELECTRICAL SPECIFICATIONS	Cord Length	6′	6'	6′	
	Defrost Initiation	Automatic	Automatic	Automatic	
	Defrost Type	Off cycle	Off cycle	Off cycle	
	Thermostat	Digital	Digital	Digital	
	Lighting Type	LED	LED	LED	
	Refrigerant	R600a (62g)	R600a (62g)	R600a (62g)	
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube	
REFRIGERATION SPECIFICATIONS	Temperature Settings F°(C°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36°(2.2°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36°(2.2°)	33° (0.5°) - 48° (8.8°) Factory Set Point 36°(2.2°)	
	Heat Rejection (at 75°F)	450 BTU/hr	450 BTU/hr	450 BTU/hr	
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr	
	Front Vented	Yes	Yes	Yes	
PLUMBING		None Required	None Required	None Required	

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

## **ACCESSORIES**

7133331113				
MODEL NOS.	DESCRIPTION			
(L)	Factory Installed Lock			
67991-L/R	Stacking Kit for HP24/HC24/HA24 models			
66736	Caster Kit for HP24/HC24/HA24 models			
RK24DP	Drawer Pan Tray (3 SS pans with covers)			

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit **perlick.com.** 



## WARNING: California Prop 65 Notice


These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at perlick.com. Or to find out more about **Prop 65**, go to **P65Warnings.ca.gov**.

Form No. Z2696 Rev 11.07.22




# 24" SIGNATURE SERIES Refrigerated Drawers

	CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
INDOOR	HP24RS-4-5	HP24RS4E-00-EDF0D	Drawers	No
	HP24RS-4-6	HP24RS4E-00-DD00D	Drawers	No
	HP24RS-4-5DL	HP24RS4E-00-EDFLD	Drawers	Yes
	HP24RS-4-6DL	HP24RS4E-00-DD0LD	Drawers	Yes
OUTDOOR	HP24RO-4-5	HP24RO4E-00-EDF0D	Drawers	No
	HP24RO-4-6	HP24RO4E-00-DD00D	Drawers	No
	HP24RO-4-5DL	HP24RO4E-00-EDFLD	Drawers	Yes
	HP24RO-4-6DL	HP24RO4E-00-DD0LD	Drawers	Yes
MARINE & COASTAL	HP24RM-4-5	HP24RM4E-00-QDF0D	Drawers	No
	HP24RM-4-6	HP24RM4E-00-DD00D	Drawers	No
	HP24RM-4-5DL	HP24RM4E-00-DD0LD	Drawers	Yes
	HP24RM-4-6DL	HP24RM4E-00-QDFLD	Drawers	Yes

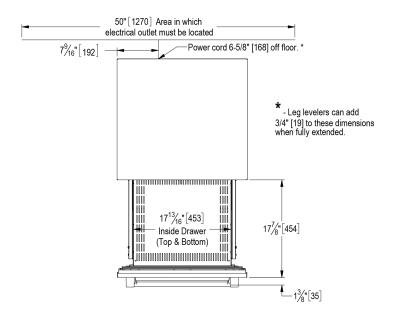

## **Drawer Models**

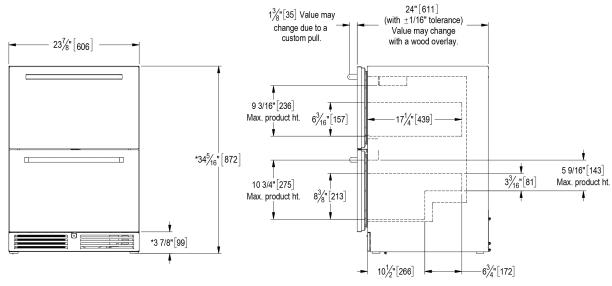

Form No. Z2696 Rev 11.07.22