



24" SIGNATURE SERIES
Refrigerator



Glass Door Model



Solid Door Model

| | |
|-----------|--|
| JOB | |
| AREA | |
| ITEM NO. | |
| MODEL NO. | |

| MODELS | DESCRIPTION |
|---------------|--|
| HP24RS-4-1R/L | Indoor Signature Series Refrigerator Solid Stainless Steel Door |
| HP24RS-4-2R/L | Indoor Signature Series Refrigerator Solid Panel Ready Door |
| HP24RS-4-3R/L | Indoor Signature Series Refrigerator Stainless Steel Glass Door |
| HP24RS-4-4R/L | Indoor Signature Series Refrigerator Panel Ready Glass Door |
| HP24RO-4-1R/L | Outdoor Signature Series Refrigerator Solid Stainless Steel Door |
| HP24RO-4-2R/L | Outdoor Signature Series Refrigerator Solid Panel Ready Door |
| HP24RO-4-3R/L | Outdoor Signature Series Refrigerator Stainless Steel Glass Door |
| HP24RO-4-4R/L | Outdoor Signature Series Refrigerator Panel Ready Glass Door |
| HP24RM-4-1R/L | Marine Signature Series Refrigerator Solid Stainless Steel Door |
| HP24RM-4-2R/L | Marine Signature Series Refrigerator Solid Panel Ready Door |
| HP24RM-4-3R/L | Marine Signature Series Refrigerator Stainless Steel Glass Door |
| HP24RM-4-4R/L | Marine Signature Series Refrigerator Panel Ready Glass Door |

KEY PRODUCT FEATURES AND BENEFITS

- Superior construction provides ideal combination of energy efficient operation & powerful refrigeration performance ideal for food and beverages
- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- All stainless steel interior and exterior provide superior durability and easy cleaning
- Full extension shelving provides faster and safer product access with no reaching in the back of the cabinet; shelves fully extend on vibration dampened stainless steel ball bearing glides
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

Quick Features:

- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready door to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Storage for up to 144 cans



24" SIGNATURE SERIES
Refrigerator

| MODEL NUMBERS | | HP24RS | HP24RO | HP24RM |
|----------------------------------|-----------------------------|---|---|---|
| MODEL DESCRIPTION | | 24" Indoor Refrigerator | 24" Outdoor Refrigerator | 24" Marine/Coastal Refrigerator |
| ATTRIBUTES | | | | |
| Perlick Anti-Condensation System | | NO | YES | YES |
| Energy Star Certified | | YES | YES | YES |
| Perlick Armor™ | | NO | NO | YES |
| OVERALL DIMENSIONS | Width - in. (mm) | 23-7/8" (606 mm.) | 23-7/8" (606 mm.) | 23-7/8" (606 mm.) |
| | Depth - in. (mm) | 24" (610 mm.) | 24" (610 mm.) | 24" (610 mm.) |
| | Height - in. (mm) | 34-1/4" (870 mm.) | 34-1/4" (870 mm.) | 34-1/4" (870 mm.) |
| STANDARD OPENING DIMENSIONS | Width - in. (mm) | 24" (610 mm.) | 24" (610 mm.) | 24" (610 mm.) |
| | Depth - in. (mm) | 24" (610 mm.) | 24" (610 mm.) | 24" (610 mm.) |
| | Height - in. (mm) | 34-1/2" (876 mm.) | 34-1/2" (876 mm.) | 34-1/2" (876 mm.) |
| INTERNAL VOLUME Net. Cu. Ft. | | 5.2 cu. ft. | 5.2 cu. ft. | 5.2 cu. ft. |
| SHIPPING WEIGHT Lbs. (kg.) | | 210 (95.3 kg) | 210 (95.3kg) | 213 (96.7 kg) |
| ELECTRICAL SPECIFICATIONS | Electrical Supply | 115 VAC/60 Hz/1 Ph | 115 VAC/60 Hz/1 Ph | 115 VAC/60 Hz/1 Ph |
| | Running Load Amps | 1.9 amps | 1.9 amps | 1.9 amps |
| | Electrical Connection | Cord connected | Cord connected | Cord connected |
| | Cord Plug Type | NEMA 3 Prong 5-15P | NEMA 3 Prong 5-15P | NEMA 3 Prong 5-15P |
| | Cord Length | 6' | 6' | 6' |
| | Defrost Initiation | Automatic | Automatic | Automatic |
| | Defrost Type | Off cycle | Off cycle | Off cycle |
| | Thermostat | Digital | Digital | Digital |
| | Lighting Type | LED | LED | LED |
| REFRIGERATION SPECIFICATIONS | Refrigerant | R600a (62g) | R600a (62g) | R600a (62g) |
| | Expansion Device | Capillary Tube | Capillary Tube | Capillary Tube |
| | Temperature Settings F°(C°) | 33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°) | 33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°) | 33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°) |
| | Heat Rejection (at 75°F) | 450 BTU/hr | 450 BTU/hr | 450 BTU/hr |
| | Pull Down Capacity | 1000 BTU/hr | 1000 BTU/hr | 1000 BTU/hr |
| | Front Vented | Yes | Yes | Yes |
| PLUMBING | | None Required | None Required | None Required |

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

ACCESSORIES

| MODEL NOS. | DESCRIPTION |
|------------|--|
| (L) | Factory Installed Lock |
| 67991-L/R | Stacking Kit for HP24/HC24/HA24 models |
| 66736 | Caster Kit for HP24/HC24/HA24 models |

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com.



WARNING: California Prop 65 Notice


These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at perlick.com. Or to find out more about **Prop 65**, go to P65Warnings.ca.gov.



24" SIGNATURE SERIES
Refrigerator

| | CUSTOMER MODEL NUMBER | REGULATORY MODEL NUMBER | Hinge Side | Lock |
|------------------|-----------------------|-------------------------|------------|------|
| INDOOR | HP24RS-4-1L | HP24RS4C-00-SLF0R | Left | No |
| | HP24RS-4-1R | HP24RS4C-00-SRF0R | Right | No |
| | HP24RS-4-2L | HP24RS4C-00-PL00R | Left | No |
| | HP24RS-4-2R | HP24RS4C-00-PR00R | Right | No |
| | HP24RS-4-3L | HP24RS4C-00-TLF0R | Left | No |
| | HP24RS-4-3R | HP24RS4C-00-TRF0R | Right | No |
| | HP24RS-4-4L | HP24RS4C-00-RL00R | Left | No |
| | HP24RS-4-4R | HP24RS4C-00-RR00R | Right | No |
| | HP24RS-4-1LL | HP24RS4C-00-SLFLR | Left | Yes |
| | HP24RS-4-1RL | HP24RS4C-00-SRFLR | Right | Yes |
| | HP24RS-4-2LL | HP24RS4C-00-PL0LR | Left | Yes |
| | HP24RS-4-2RL | HP24RS4C-00-PR0LR | Right | Yes |
| | HP24RS-4-3LL | HP24RS4C-00-TLFLR | Left | Yes |
| | HP24RS-4-3RL | HP24RS4C-00-TRFLR | Right | Yes |
| | HP24RS-4-4LL | HP24RS4C-00-RL0LR | Left | Yes |
| | HP24RS-4-4RL | HP24RS4C-00-RR0LR | Right | Yes |
| OUTDOOR | HP24RO-4-1L | HP24RO4C-00-SLF0R | Left | No |
| | HP24RO-4-1R | HP24RO4C-00-SRF0R | Right | No |
| | HP24RO-4-2L | HP24RO4C-00-PL00R | Left | No |
| | HP24RO-4-2R | HP24RO4C-00-PR00R | Right | No |
| | HP24RO-4-3L | HP24RO4C-00-TLF0R | Left | No |
| | HP24RO-4-3R | HP24RO4C-00-TRF0R | Right | No |
| | HP24RO-4-4L | HP24RO4C-00-RL00R | Left | No |
| | HP24RO-4-4R | HP24RO4C-00-RR00R | Right | No |
| | HP24RO-4-1LL | HP24RO4C-00-SLFLR | Left | Yes |
| | HP24RO-4-1RL | HP24RO4C-00-SRFLR | Right | Yes |
| | HP24RO-4-2LL | HP24RO4C-00-PL0LR | Left | Yes |
| | HP24RO-4-2RL | HP24RO4C-00-PR0LR | Right | Yes |
| | HP24RO-4-3LL | HP24RO4C-00-TLFLR | Left | Yes |
| | HP24RO-4-3RL | HP24RO4C-00-TRFLR | Right | Yes |
| | HP24RO-4-4LL | HP24RO4C-00-RL0LR | Left | Yes |
| | HP24RO-4-4RL | HP24RO4C-00-RR0LR | Right | Yes |
| MARINE & COASTAL | HP24RM-4-1L | HP24RM4C-00-MLF0R | Left | No |
| | HP24RM-4-1R | HP24RM4C-00-MRF0R | Right | No |
| | HP24RM-4-2L | HP24RM4C-00-PL00R | Left | No |
| | HP24RM-4-2R | HP24RM4C-00-PR00R | Right | No |
| | HP24RM-4-3L | HP24RM4C-00-NLF0R | Left | No |
| | HP24RM-4-3R | HP24RM4C-00-NRFOR | Right | No |
| | HP24RM-4-4L | HP24RM4C-00-RL00R | Left | No |
| | HP24RM-4-4R | HP24RM4C-00-RR00R | Right | No |
| | HP24RM-4-1LL | HP24RM4C-00-MLFLR | Left | Yes |
| | HP24RM-4-1RL | HP24RM4C-00-MRFLR | Right | Yes |
| | HP24RM-4-2LL | HP24RM4C-00-PL0LR | Left | Yes |
| | HP24RM-4-2RL | HP24RM4C-00-PR0LR | Right | Yes |
| | HP24RM-4-3LL | HP24RM4C-00-NLFLR | Left | Yes |
| | HP24RM-4-3RL | HP24RM4C-00-NRFLR | Right | Yes |
| | HP24RM-4-4LL | HP24RM4C-00-RL0LR | Left | Yes |
| | HP24RM-4-4RL | HP24RM4C-00-RR0LR | Right | Yes |

Perlick® 24" SIGNATURE SERIES Refrigerator

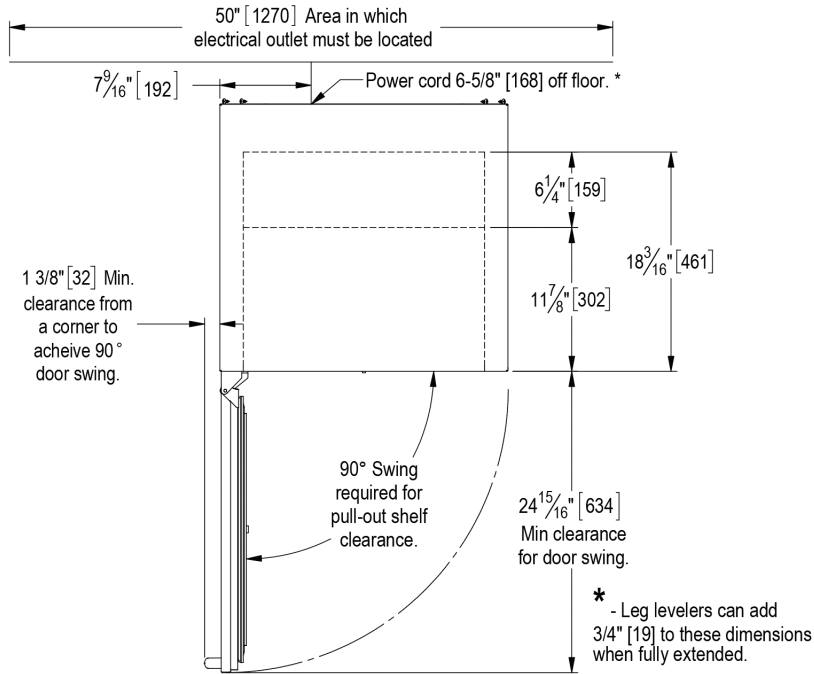

Door Models

