



# PERLICK®



MODEL NUMBERS – MOBS-42TE, MOBS-66TE, MOBS-66TE-S,

## Perlick Signature Mobile Bars Designed by Tobin Ellis



MOBS-42TE



MOBS-66TE



MOBS-66TE-S

|           |  |
|-----------|--|
| JOB       |  |
| AREA      |  |
| ITEM NO.  |  |
| MODEL NO. |  |

| MODELS      |
|-------------|
| MOBS-42TE   |
| MOBS-66TE   |
| MOBS-66TE-S |

## THE BARTENDER'S COCKPIT THAT CAN GO ANYWHERE

Perlick's Signature Mobile Bars feature the Tobin Ellis zero-step bartending cockpit design that increases efficiency, maximizes drink throughput, and ensures bartender comfort. Finally, a mobile bar that doesn't compromise speed or quality for mobility! Combine several units to build a full mobile bar surround. Perfect for rooftops, patios, sidewalk cafes, or anywhere you want more beverage production, more physical distancing, and maximum flexibility.

### Quick Features:

- Tobin Ellis bartender cockpit for increased throughput, profitability, and bartender comfort
- Laminate, stainless steel, or engineered solid surface bar top options
- Laminate exterior offered in multiple colors
- Ice melt drainage tank
- Locking 5" 304 stainless steel casters, for corrosion resistance, with polyurethane tread
- Lower storage area for backup stock, bustubs, glass racks, and more
- Dimmable LED bartender task lighting for operating in the evening light environments
- Stainless steel drink rail

Form No. Z2648  
Rev. 05.13.25



# PERLICK®



MODEL NUMBERS - MOBS-42TE, MOBS-66TE, MOBS-66TE-S,

## Perlick Signature Mobile Bars Designed by Tobin Ellis

| MODEL NOS.                                    |                       | MOBS-42TE                                                                                 | MOBS-66TE                                                                                 | MOBS-66TE-S                                                                               |
|-----------------------------------------------|-----------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| <b>DIMENSIONS:<br/>EXTERIOR (mm)</b>          | Length                | 46-1/4" (1175)                                                                            | 70-1/8" (1785)                                                                            | 70-1/8" (1785)                                                                            |
|                                               | Width                 | 35-9/16" (903)                                                                            | 35-9/16" (903)                                                                            | 35-9/16" (903)                                                                            |
|                                               | Height                | 46-5/16" (1176)                                                                           | 46-5/16" (1176)                                                                           | 46-5/16" (1176)                                                                           |
|                                               | Weight (lbs)          | 239 lbs. (108 kg)                                                                         | 351 lbs. (159 kg)                                                                         | 380 lbs. (172 kg)                                                                         |
| <b>DIMENSIONS:<br/>SHIPPING (mm)</b>          | Length                | 60" (1524)                                                                                | 75" (1905)                                                                                | 75" (1905)                                                                                |
|                                               | Width                 | 40" (1016)                                                                                | 40" (1016)                                                                                | 40" (1016)                                                                                |
|                                               | Height                | 70" (1778)                                                                                | 70" (1778)                                                                                | 70" (1778)                                                                                |
|                                               | Weight (lbs)          | 319 lbs. (145 kg)                                                                         | 451 lbs. (205 kg)                                                                         | 480 lbs. (218 kg)                                                                         |
| <b>PERLICK BAR EQUIPMENT</b>                  | Ice Chest             | TS30IC with sliding Cover                                                                 | TS30IC with sliding Cover                                                                 | TS30IC with sliding Cover                                                                 |
|                                               | Insulated Bottle Well | TSC12IBW                                                                                  | TSC12IBW                                                                                  | TSC12IBW                                                                                  |
|                                               | Drainboard            | N/A                                                                                       | TSCS12 (2 ea.)                                                                            | TSCS12 (1 ea.)                                                                            |
|                                               | Hand Sink             | N/A                                                                                       | N/A                                                                                       | TS12HSN with side splash                                                                  |
|                                               | Speed Rail            | SRC-CL left curved (1 ea.)<br>SRC-CR right curved (1 ea.)<br>SRC-S18 18" straight (1 ea.) | SRC-CL left curved (1 ea.)<br>SRC-CR right curved (1 ea.)<br>SRC-S18 18" straight (1 ea.) | SRC-CL left curved (1 ea.)<br>SRC-CR right curved (1 ea.)<br>SRC-S18 18" straight (1 ea.) |
| <b>ELECTRICAL</b>                             | Voltage               | 120V AC                                                                                   | 120V AC                                                                                   | 120V AC                                                                                   |
|                                               | Frequency             | 60 Hz                                                                                     | 60 Hz                                                                                     | 60 Hz                                                                                     |
|                                               | Phase                 | Single                                                                                    | Single                                                                                    | Single                                                                                    |
|                                               | Amperage              | 0.3 A                                                                                     | 0.4 A                                                                                     | 13.3 A                                                                                    |
|                                               | Connection            | NEMA 5-15P                                                                                | NEMA 5-15P                                                                                | NEMA 5-15P                                                                                |
|                                               | Cord Length           | 12ft                                                                                      | 12ft                                                                                      | 12ft                                                                                      |
| <b>DIMMABLE LED TASK LIGHTING</b>             | Color Temperature     | 4000K                                                                                     | 4000K                                                                                     | 4000K                                                                                     |
|                                               | Lumen Output          | High - 1200 LM<br>Medium - 800 LM<br>Low - 400 LM                                         | High - 1200 LM<br>Medium - 800 LM<br>Low - 400 LM                                         | High - 1200 LM<br>Medium - 800 LM<br>Low - 400 LM                                         |
| <b>WATER HEATER</b>                           | Temperature Range     | N/A                                                                                       | N/A                                                                                       | 50°F - 140°F (10°C - 60°C)                                                                |
|                                               | Tank Volume           | N/A                                                                                       | N/A                                                                                       | 1.5 gal (5.7 L)                                                                           |
|                                               | Recovery time @ 60°^  | N/A                                                                                       | N/A                                                                                       | 8 minutes                                                                                 |
| <b>WATER PUMP</b>                             | Max Flow              | N/A                                                                                       | N/A                                                                                       | 3 GPM (11.3 LPM)                                                                          |
|                                               | Switch Off Pressure   | N/A                                                                                       | N/A                                                                                       | 45 PSI (3.1 bar)                                                                          |
| <b>GRAY WATER/ICE MELT TANK (PRE-PLUMBED)</b> | Capacity              | 5 gal (18.9 L)                                                                            | 5 gal (18.9 L)                                                                            | 6 gal (22.7 L)                                                                            |
| <b>POTABLE WATER TANK (PRE-PLUMBED)</b>       | Capacity              | N/A                                                                                       | N/A                                                                                       | 5 gal (18.9 L)                                                                            |

### LAMINATE EXTERIOR OPTIONS



☐ Black  
(BL)



☐ Pewter Brush  
(PB)



☐ Beige Suede  
(BS)



☐ Maple  
(MP)



☐ Red Maple  
(RM)



☐ Gray Sand  
(GS)



☐ Ebony Wood  
(EW)



☐ Amber Maple  
(AM)



☐ Mahogany  
(MH)



☐ Victorian  
Cherry  
(VC)

**Note:** Custom Vinyl wrap graphics available (Must call Perlick for quote and ordering process) - (VW)

### BAR TOP OPTIONS

#### Standard



☐ Black  
(BL)



☐ Pewter Brush  
(PB)



☐ Beige Suede  
(BS)



☐ Maple  
(MP)



☐ Red Maple  
(RM)



☐ White Quartz  
(WQ)



☐ Black Pearl  
(BP)



☐ Stainless Steel  
(SS)



☐ Gray Sand  
(GS)



☐ Ebony Wood  
(EW)



☐ Amber Maple  
(AM)



☐ Mahogany  
(MH)



☐ Victorian Cherry  
(VC)



☐ Allspice Quartz  
(AQ)

#### Engineered Solid Surface

#### Stainless Steel

Form No. Z2648  
Rev. 05.13.25





# PERLICK®



**Perlick Signature Mobile Bars**  
**Designed by Tobin Ellis**

## MOBS-42TE

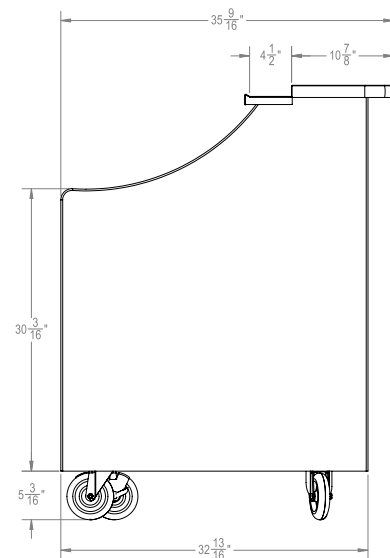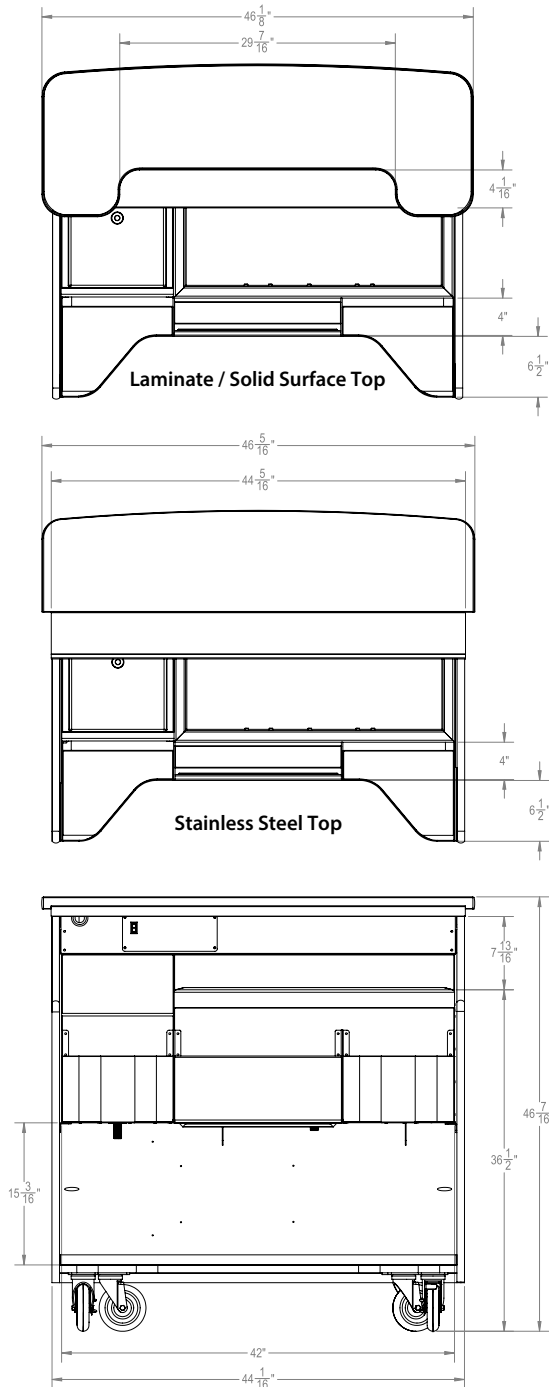

MODEL NUMBERS - MOBS-42TE, MOBS-66TE, MOBS-66TE-S,







# PERLICK®



MODEL NUMBERS - MOBS-42TE, MOBS-66TE, MOBS-66TE-S,

## Perlick Signature Mobile Bars Designed by Tobin Ellis

### MOBS-66TE

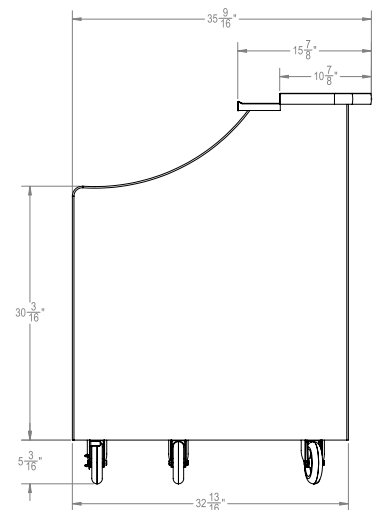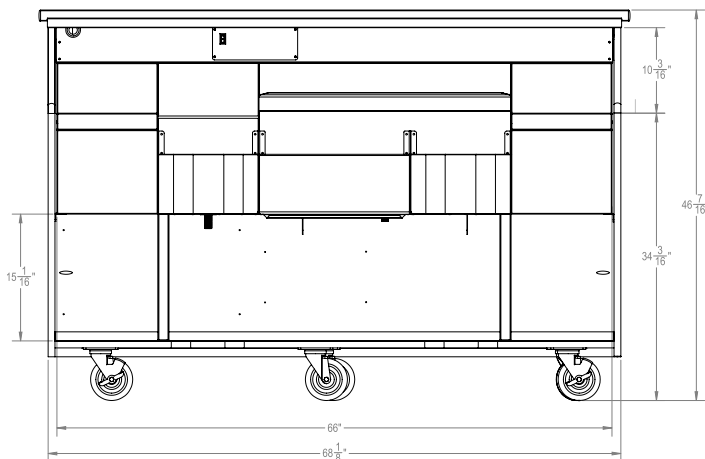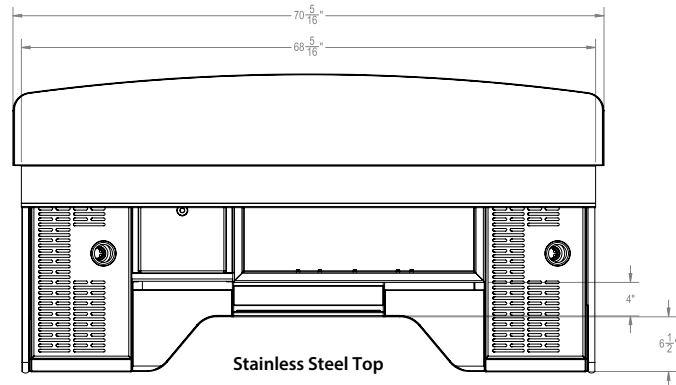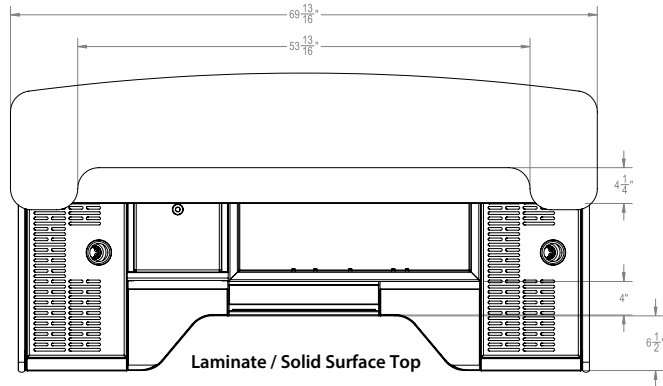

Form No. Z2648  
Rev. 05.13.25

## Perlick Signature Mobile Bars Designed by Tobin Ellis

### MOBS-66TE-S

