



G5 LUXE SHALLOW DEPTH ADA 24" WINE RESERVE



Crafted with over a century of premier commercial refrigeration expertise, the Perlick G5 collection brings the most innovative refrigeration available into the home—empowering hosts to serve effortlessly, whether for one guest or many.

Job:
Area:
Item #:
Model #:



G5WR24GD

*Image shown with door panel installed, door panel ordered separately.



G5WR24SD

*Image shown with door panel installed, door panel ordered separately.



MODEL NUMBER	ITEM NUMBER	DESCRIPTION
G5WR24SD	URD24W21-5-SRW0	Wine Reserve, Solid Door, Shallow ADA, G5 Luxe
G5WR24GD	URD24W41-5-SRW0	Wine Reserve, Glass Door, Shallow ADA, G5 Luxe

G5 Luxe Collection Feature-Benefits

- **High-Performance Cooling:** Perlick’s fastest cool-down speed yet, powered by Perlick’s exclusive RAPIDcool™ technology chills every beverage quickly and evenly throughout the cabinet
- **Seamless, Beautiful Design:** Sleek cabinet profile and fully concealed, soft-closing hinges integrate effortlessly into surrounding cabinetry
- **Commercial-Grade:** Industry-exclusive 300-series stainless steel interiors and exteriors provide corrosion-resistance and durability
- **Trusted Performance:** Certified for indoor and outdoor use, delivering consistent performance in kitchens, patios, or rooftop terraces
- **Smart Technology:** Adapts to your usage and environment for frost-free, consistent cooling, while continuously monitoring unit health for easy troubleshooting and fast remote support
- **Industry’s Best Warranty:** 6 years parts and labor, plus a 30-day initial aesthetics parts and labor warranty
- **Quick-Cool Mode:** Chills beverages up to 20% faster for on-demand cooling
- **Intuitive Touchscreen Controls:** Sleek, modern interface with temperature, lighting, and diagnostics on an easy-to-use interface
- **Total Color Control™ LED Lighting:** 20 curated settings, including four distinct white tones, to create any desired aesthetic
- **Signature Legacy Handle:** Premium knurled stainless grip with cast end caps embossed with the Perlick emblem
- **Ultra-Quiet Performance:** Powered by Perlick-exclusive variable speed technology, G5 delivers up to 55% quieter operation than previous generations—our quietest performance yet.
- **Triple-Pane Glass Doors:** Low-E, argon-filled, UV-resistant glass reduces energy transfer and strengthens durability
- **Perlick Anti-Condensation System™:** Prevents condensation from forming on the exterior of the cabinet
- **Easy Installation:** Patent-pending front-access leveling legs allow quick adjustments without tipping the unit
- **Better For The Environment Refrigerant:** This product uses R600a refrigerant which has zero ODP and very low GWP
- **Exclusively Perlick:** Exclusively designed, engineered and manufactured by Perlick
- **Sabbath Mode-Star K certified** that allows equipment to operate in accordance with Halacha, Shabbat, and Jewish Holidays

G5 Luxe Wine Reserve Feature-Benefits

- An open-shelf design lets cold air flow evenly around each bottle, reducing temperature fluctuations and extending wine life
- Vinyl coated steel shelves with stainless steel fronts, shelves are capable of mounting custom wood (or other material) fronts to match custom cabinetry
- 40°F (4.4°C) – 68°F (20°C), Factory Set Point 55°F (12.8°C)



800.558.5592

perlick.com



PERLICK®



G5 LUXE SHALLOW DEPTH ADA 24" WINE RESERVE

MODEL NUMBERS		G5WR24SD, G5WR24GD
MODEL DESCRIPTION		Wine Reserve, Shallow ADA, G5 Luxe
OVERALL DIMENSIONS	Width - in. (mm)	23 7/8 (606)
	Depth - in. (mm)	17 1/4 (438)
	Height - in. (mm)	32 (813)
OPENING DIMENSIONS	Width - in. (mm)	24 (610)
	Depth - in. (mm)	18 (457)
	Height - in. (mm)	32 1/4 (819)
INTERNAL VOLUME Net. Cu. Ft. (L).		3.1 (87)
SHIPPING WEIGHT Lbs. (kg).		204 (93)
EQUIPMENT WEIGHT Lbs. (kg).		165 (75)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115VAC/60 Hz/1 Ph
	Running Load Amps	1.8
	Electrical Connection	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P
	Cord Length	6'
	Defrost Initiation	Automatic
	Defrost Type	Off cycle
	Thermostat	Digital
	Lighting Type	LED
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (48g)
	Expansion Device	Capillary Tube
	Temperature Settings F (C)	40° (4.4°) - 68° (20°) Factory Set Point 55° (12.8°)
	Heat Rejection (at 75°F)	350 BTU/hr
	Front Vented	Yes

Installation Notes: To achieve 18" install depth, you must recess the outlet 7/8" into the wall behind the unit, place the electrical connection adjacent to the installation cavity, or align the outlet with recess on back of the unit.


Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com



800.558.5592

perlick.com

G5 LUXE SHALLOW DEPTH ADA 24" WINE RESERVE

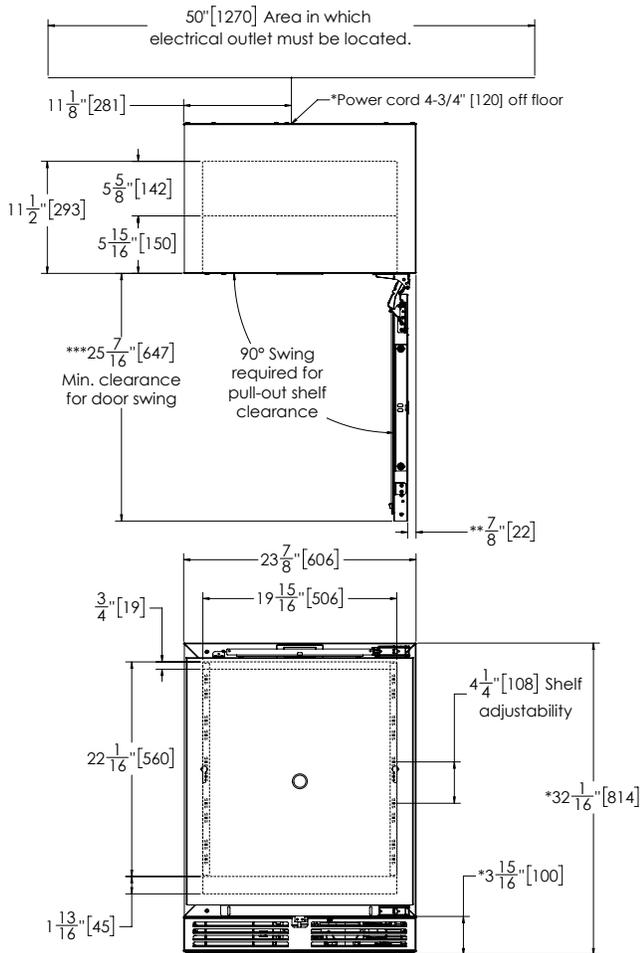

*Leg levelers can add 3/4" [19] to these dimensions when fully extended

** Overlay will add additional 3/4" [19] to overall depth. In addition, overall depth will change depending on handle selected

*** Minimum clearance for door swing is shown without door overlay installed

