24" DUAL-ZONE WINE COLUMN

Panel Ready Glass Door

JOB	
AREA	
ITEM NO.	
MODEL NO.	



Shown with optional stainless steel door overlay panel



Shown with convertible shelf in display mode

MODELS	DESCRIPTION
CC24D-2-4LL	24" Dual Zone Wine Column, Glass Door, Overlay Ready, Hinge Left
CC24D-2-4RL	24" Dual Zone Wine Column, Glass Door, Overlay Ready, Hinge Right

KEY PRODUCT FEATURES AND BENEFITS

- Smart Humidity advanced technology monitors humidity levels in the cabinet and pushes additional moisture into the cabinet to maintain 60-70% humidity maintaining corks and prevent oxidation
- Carbon air filtration removes odors from the cabinet that could be absorbed into corks over time
- PerliQ™ touch screen control panel disappears into the background until awoken for a modern look
- Customize temperature, activate sabbath mode, or adjust lighting with the sleek PerliQ™ Control panel – Smart temperature settings for red and white wine
- All stainless steel and glass interior provides a hygienic, easy to clean, and beautiful cabinet
- R600a refrigerant - More efficient & better for the environment

Quick Features:

- Triple-pane, UV-resistant glass provides protection from harmful light oxidation
- Convertible display shelf showcases 6 prized wine bottles and easily lays flat to store 8 bottles without additional parts and pieces
- Blue and White LED Interior lighting; Slow fade on and off; Lighting brightness control displays intensity settings in 20% increments (20-40-60-80-100%)
- High-capacity storage up to 68 750ml bottles
- All cabinets come ready to accept a locking panel from factory with all components included to install lock on custom panels
- Integrated design comes ready to accept custom panel and hardware, stainless steel panels available (ordered separately)
- 1 Year Full Parts & Labor + 5 Year Compressor Parts

Form No. Z3016
Rev 09.29.25

24" DUAL-ZONE WINE COLUMN

Panel Ready Glass Door

MODEL NUMBERS		CC24D-2-4LL	CC24D-2-4RL
MODEL DESCRIPTION		24" Dual-Zone Wine Column Left Hinge	24" Dual-Zone Wine Column Right Hinge
APPLIANCE EXTERIOR DIMENSIONS	**Width - in. (mm)**	23-3/4" (604)	23-3/4" (604)
	Depth - in. (mm)	24-1/16" (612)"**	24-1/16" (612)"**
	Height - in. (mm)	84" (2134)*	84" (2134)*
OPENING DIMENSIONS	**Width - in. (mm)**	24" (610)	24" (610)
	Depth - in. (mm)	25"** (635)	25"** (635)
	Height - in. (mm)	84" (2134)	84" (2134)
DEPTH WITH DOOR OPEN		49-3/4"	49-3/4"
INTERNAL VOLUME Net. Cu. Ft.		12.6 cu. ft.	12.6 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		514 lbs (233)	514 lbs (233)
SHIPPING DIMENSIONS	**Width - in. (mm)**	32" (813)	32" (813)
	Depth - in. (mm)	30" (762)	30" (762)
	Height - in. (mm)	92" (2337)	92" (2337)
ELECTRICAL SPECIFICATIONS	**Electrical Supply**	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	3.2 amps	3.2 amps
	Electrical Service	15 amp dedicated circuit	15 amp dedicated circuit
	Cord Plug Type	NEMA 5-15 plug, 5'/3 prong grounding-type	NEMA 5-15 plug, 5'/3 prong grounding-type
MAX BOTTLE CAPACITY		68 750 ml. bottles	68 750 ml. bottles
SOUND PRESSURE RATING		42 dBA	
TEMPERATURE RANGES	**Refrigerant**	R600a (53g)	R600a (53g)
	Red Wine Mode	Factory set to 60° (range 40°-68°F)	Factory set to 60° (range 40°-68°F)
	White Wine Mode	Factory set to 50° (range 40°-68°F)	Factory set to 50° (range 40°-68°F)
	Cellar Mode	Factory set to 55° (range 40°-68°F)	Factory set to 55° (range 40°-68°F)

**Leveling legs allow for up to 3/4" of additional height. Leveling appliance correctly will lead to less door adjustments required.*

***Depth does not include door panel, minimum 5/8" door panel is required, see installation instructions for full door panel details.*

NOTE: Dual zone wine upper compartment temperature set point must always be set at or above the lower compartment set point.

ACCESSORIES


- 36" Two tone polished chrome and stainless steel handle
- Dual installation kits for handle-to-handle and handle-to hinge configurations
- Stainless steel overlay for glass door with four or six inch toe kick available with and without lock for field installation

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit **perlick.com.**

PERLICK CORPORATION 8300 W. Good Hope Rd., Milwaukee, WI 53223 • (800) 558-5592 • perlick.com

24" DUAL-ZONE WINE COLUMN

Panel Ready Glass Door

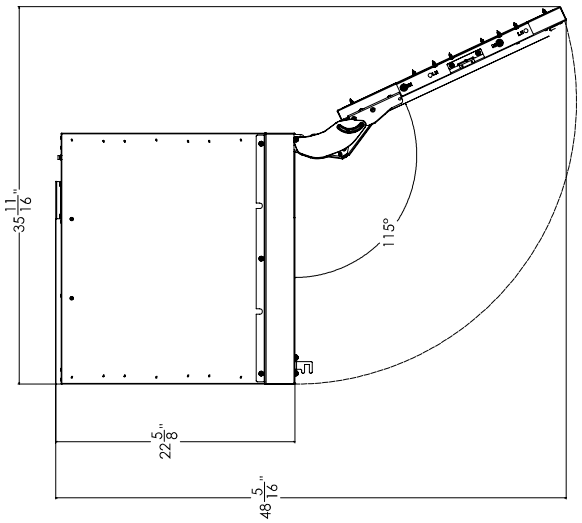


Max clearance required for opened door is 49-3/4" when opened to 90°* (dimensions shown are without door overlay installed.)


(Please note that door opens to 115°.)


*90° achieved when included hinge stop pin is installed. Pin must be installed prior to full integration.

PLEASE NOTE: When installing column adjacent to wall, a 2" clearance is required if door opens towards the wall.

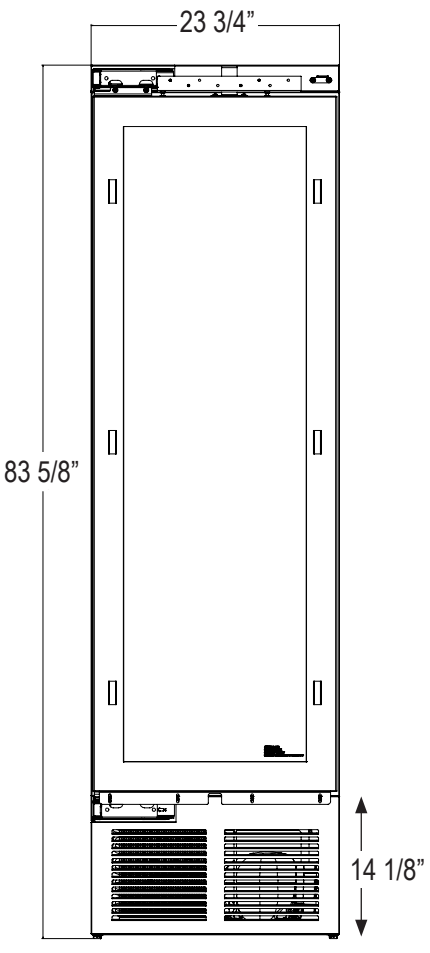

GLASS DOOR
FRONT VIEW

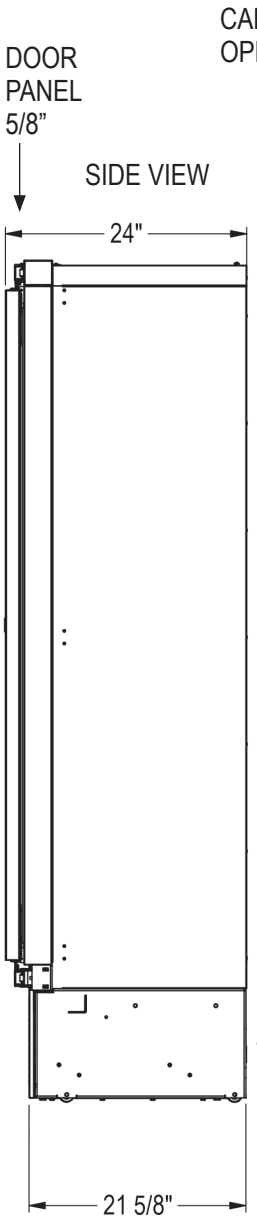

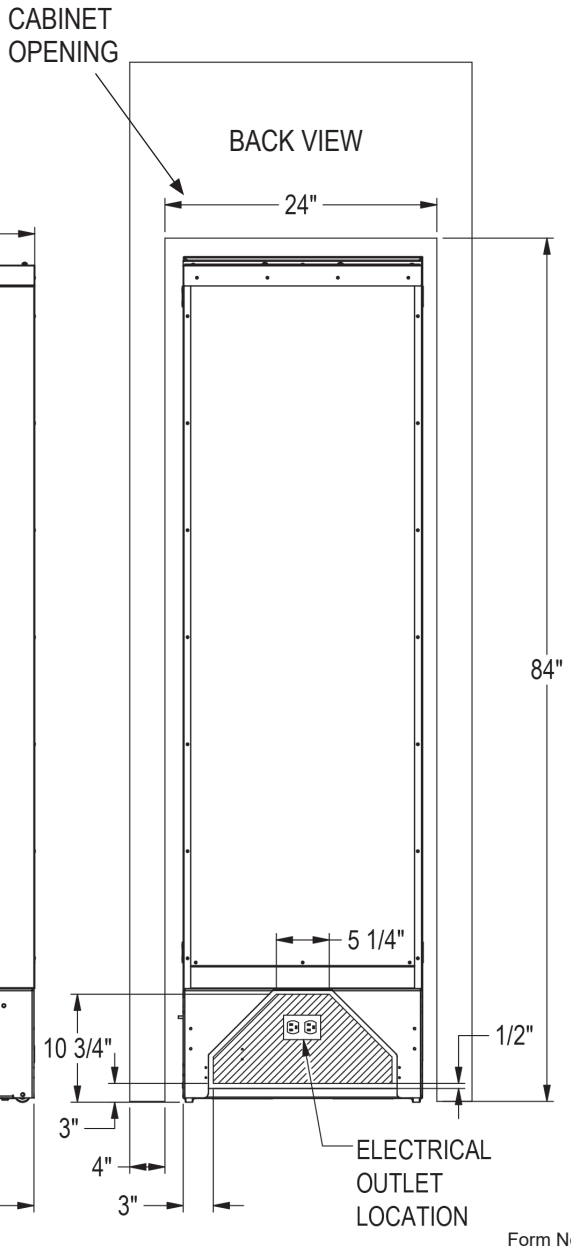

Form No. Z3016
Rev 09.29.25