



COCKPIT ICE CHEST

Perlick ice chests deliver organized ice storage with optional dividers for efficient workflow. A shallow-depth design and raised work height improve ergonomics, comfort, and bartender efficiency.

Job:
Area:
Item #:
Model #:



TSC361C
Shown with optional ice covers



COCKPIT ICE CHEST

MODEL NUMBER
TSC241C
TSC301C
TSC361C
TSC421C
TSC241C10
TSC301C10
TSC361C10
TSC421C10

Feature-Benefits

- Dent-resistant ABS top ledge provides better resilience against dents and wear in a fast-packed working bar
- Optional "clip-on" ice dividers create separated ice storage to keep all your cube sizes right at your finger tips
- Unique design allows the bartender to stand closer to their work counter and guests
- Raised work height improves ergonomics and reduces reaching and bending
- Stainless steel legs install without tools and have adjustable rust-free thermoplastic feet
- Polished Stainless interior for easier cleanability and highest sanitary rating
- Shallower depth allows the bartender to stand closer to their work counter and guests
- Highest rated foamed-in-place insulated walls

MODEL NUMBERS -TSC241C, TSC301C, TSC361C, TSC421C, TSC241C10, TSC301C10, TSC361C10, TSC421C10



800.558.5592

perlick.com



MODEL NUMBERS - TSC241C, TSC301C, TSC361C, TSC421C, TSC241C10, TSC301C10, TSC361C10, TSC421C10

***Note:** Covers not included.



perlick.com




COCKPIT ICE CHEST



MODEL NOS.		TSC24IC10	TSC30IC10	TSC36IC10	TSC42IC10
DIMENSIONS: EXTERIOR (mm)	LENGTH IN. (mm)	24 (610)	30 (762)	36 (914)	42 (1067)
	ICE CAP. lbs. (kg)	50 (22.7)	64 (27.2)	78 (35.4)	92 (41.7)
	SHIP WT. lbs (kg)	130 (60)	140 (63.5)	150 (68.0)	160 (72.6)
CONSTRUCTION		All Stainless steel with ABS top rim			
		TSC Series: Stainless steel 6" high (4" optional) with 1" return at top, mechanically fastened and sealed to ice chest top. TSD Series: Not applicable			
COVERS*		Stainless steel, three-piece, removable			
INTERIOR		Stainless steel with 1/4" radius corners, welded and sealed with non-exposed cold plate. Interiors can be divided with accessory "clip-on" ice dividers			
INSULATION		Foamed-in-place polyurethane			
COLD PLATE		Cast aluminum plate concealed under ice chest liner. Cold plate has 2 full-length circuits and 8 halflength circuits. Connections - 5/16" O.D. stainless steel tubing with swaged end to accept standard 1/4" I.D. beverage tubing			
OPERATING SPECIFICATIONS		Each full circuit will deliver four 6 oz. drinks per minute at 40° continuously, or 40 oz. every three minutes in a single draw (flow rate 2 oz./sec, 75° product)			
LEGS		1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot (4 legs are standard)			
PLUMBING		Drain connection- 1/2" - 14 NPSM male			
ACCESSORIES		Three-piece covers, "clip-on" dividers and bottle tray			

*Note: Covers not included.

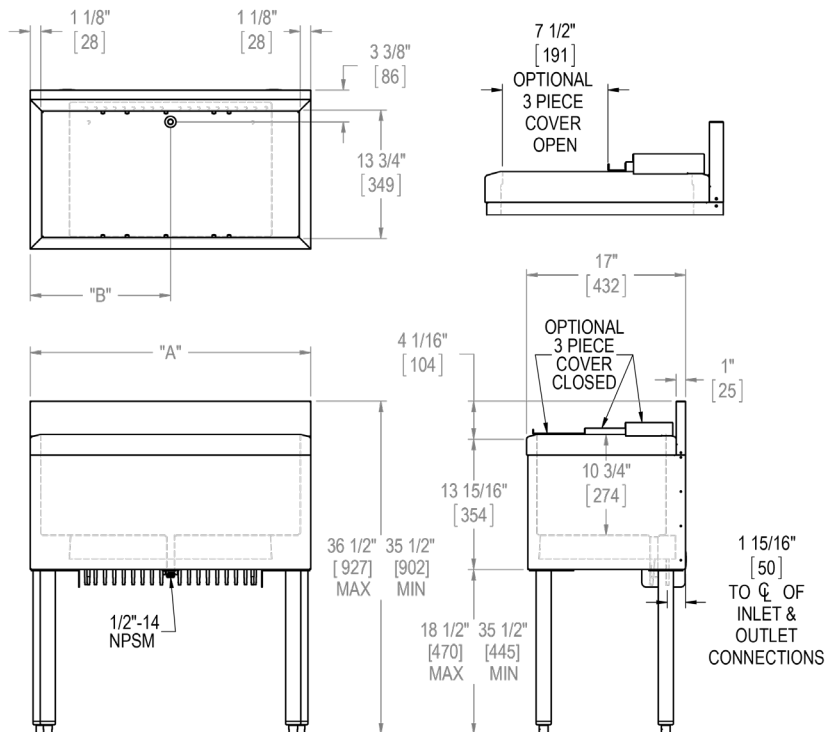

MODEL NUMBERS -TSC24IC, TSC30IC, TSC36IC, TSC42IC, TSC24IC10, TSC30IC10, TSC36IC10, TSC42IC10



800.558.5592

perlick.com